

# EDDYCHEK® 610

The high-performance eddy current testing system for complex quality and process control tasks



- tubes, bars & wire - all applications
- graphical user interface
- fully digital signal processing
- modular structure – expandable
- up to 10 channels at 6 test positions

# Reliable semi-finished product testing

## EDDYCHEK® 610 – Technical Data


<b>General</b>	
	Reliable, economical, powerful eddy current testing system for use in production with fully digital signal processing: each channel with its own oscillator and its own patented* digital demodulator. (*U.S. Patent 8,841,902)
<b>Applications</b>	
Field of application	Final testing and quality assurance in the production of tubing, pipe, bar, wire, strip, cable sheathing, extruded sections (roll forming, tube mills, drawing machines) Process control (e. g. cut lengths and coil-to-coil) Any conductive material e. g. nonferrous, ferrous metals (ferritic, austenitic, duplex)
Testing modes and speeds	Inline: Continuous production with cut-off (e. g. welding lines) max. 20m/s Wire: Continuous production with cut-off (e. g. drawing lines, hot rolling mills, level winder) max. 250 m/s Offline: Testing of cut lengths, max. 10 pieces per sec. Stop-and-Go: Cold forming applications Speed measurement with encoder up to 40kHz Speed measurement with light barrier
Marker resolution	1 mm at v < 1 m/s 10 mm at v < 10 m/s 100 mm at v < 100 m/s
Testing procedure	Multichannel, multifrequency testing (differential system) Band width approx. 15 kHz Up to 10 channels at up to 6 testing positions: combination of rotational, differential, absolute and FERROCHEK channels
<b>Parameters</b>	
Frequency and filtering	Test frequencies: 41 discrete frequencies 100Hz–1 MHz Filter frequencies HP 0,008 – 20kHz; LP 0,015 – 40 kHz Each coil driver with its own oscillator and each channel processor with its own patented* digital demodulator (no multiplexing!) Speed-coupled, automatic bandpass filter (optional)
Phase rotation	0 – 359° in steps of 1°
Gain	-12 dB to 120 dB in 0.1 dB steps for absolute, differential and rotational channel
Coil monitoring	Monitoring of the transmitter and receiver coil Automatic reading of the coil information when using Smart Sensors
End signal suppression	Control of testing signals at start/finish of cut lengths
<b>Data processing</b>	
Signal processing and defect evaluation	Signal evaluation with masks types and 3 alarm thresholds – Circular masks – Mirrored sector masks, 2 pair/channel with remaining sector – Y mask 1 oder 2 XY displays with any channel selection 1 oder 2 RT displays with any channel selection. Without data loss the signal can be stopped, zoomed and scrolled back into the past Classification of the test pieces in up to 3 sorting classes according to flaw type, flaw density and number of flaws
Test results	Compilation on 2 levels: per order and part/batch Save the test results order-related as XML file (single alarms, RT value, XY data)
Interface to a SQL database (optional)	For storing lines parameters, test parameters and test results

<b>Software</b>	
Signal evaluation	Multitasking RTOS, non-volatile
User interface	Touchscreen operation using icons Archiving of testing parameters for later retrieval Sample test mode: testing of individual lengths for quality control checks and parameter verification Graphical user interface and context sensitive help in local language Password protected supervisor level for adjusting basic testing parameters and locking access to parameters with user level rights
Reporting software	EDDYTREND: Viewing and analyzing of testing signals; identifying quality trends (option)
Data transfer	Standard LAN: Ethernet (TCP/IP), 1 Gbit/s
<b>Hardware</b>	
Screen and housing	15" Color display, 1024x768 Pixel Environmental protection IP52 against dust and dripping water Shielded housing and internal power supply filter to prevent interference according to VDE843 CE EN 50081-2 and IEC 801.1-4 EN 50082-2 Standards fulfilled according to EMC: DIN EN 61326-1; VDE 0843-20-1:2013-07; (IEC 61326-1:2012); EN 61326-1:2013; DIN EN 61326-2-2; VDE 0843-20-2-2:2013-08; (IEC 61326-2-2:2012); EN 61326-2-2:2013 Dimensions (HxWxD): 461,5 x 444 x 556 mm (18,2" x 17,5" x 21,9"), 10 height units Weight: max 40 kg (88lb), depending on number of channels
Input	Touchscreen (operable with gloves) External keyboard and mouse (optional) via USB
Storage	SSD 128 GB
Operating conditions	Temperature range: -10°C – 40°C (14°F – 113°F) Internal heat exchanger with temperature-controlled fans

<b>Input and output interfaces</b>	
	16 inputs potential free 24V 16 outputs potential free 24V, 1 A/output, 2 A in total per system Max. of 10 delayed or undelayed potential free marker outputs; max 3 sorting outputs 1 system error output 1 line encoder input, 2-track 3 USB 2.0 connectors 1 HDMI interface for external monitor (optional) Network: Ethernet (TCP/IP)

<b>Power supply</b>	
	100 – 240 V; 47 – 63 Hz Power consumption: max. 300 VA

<b>Dimensions</b>	
-------------------	--

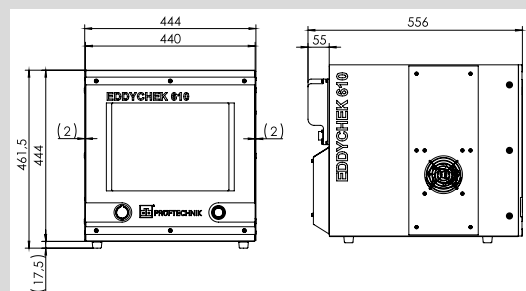

EDDYCHEK® is a registered trademark of PRUFTECHNIK Dieter Busch AG. No copying or reproduction of this information, in any form whatsoever, may be undertaken without express written permission of PRUFTECHNIK Dieter Busch AG. The information contained in this leaflet is subject to change without further notice due to the PRUFTECHNIK policy of continuous product development. PRUFTECHNIK products are subject to patents granted or pending throughout the world. ISO 9001:2008 certified. © Copyright 2017 by PRUFTECHNIK Dieter Busch AG.

Distributed By :

**ARORA**  
Arora Technologies (P) Limited

Plot No. D-183/8, MIDC, TTC Nerul, Navi Mumbai, Maharashtra 400706, India  
T : +91 22 6138 0600 | E : info@arorandt.com | W : www.arorandt.com



PR FTECHNIK NDT GmbH  
Am Lenzenfleck 21  
85737 Ismaning, Germany  
www.ndt.pruftechnik.com  
Tel.: +49 89 99616-0  
Fax: +49 89 967990  
E-Mail: ndt-sales@pruftechnik.com

A member of the PR FTECHNIK group

DOK6100EN.09.19